

Stainless Steel Globe Valves for Cryogenic Service

SK Advantage Series Medium Stem, Inlet Socket Weld, Outlet Threaded NPT



Application

The SK Advantage Series of Stainless Steel Globe Valves are designed for handling cryogenic liquids through trailer, bulk vessels and piping configurations. Ideal service medium includes oxygen, nitrogen, krypton, carbon dioxide, dinitrogen monoxide, carbon oxide, methane, ethane, ethylene, argon and LNG. Our Kold-Seal stem seal technology assures a tight seal preventing cryogen gas loss. The conical seat design allows exceptional flow, positive shutoff and less chance of debris accumulation in the flow path, all resulting in an overall longer service life. Maintenance on the packing and seat is quick and easy.

Features

- **Soft Seat:** PTFE material which is the most widely specified cryogenic seat material in the industry
- **Construction:** Bolted bonnet allows easy access to the valve internals for servicing
- **Stem Packing:** Proven Kold-Seal technology, Live Loaded PTFE
- **Sizes:** 1/4" through 2"
- **Connection:** Threaded NPT
- **Service:** Liquefied and vaporized atmospheric gases, LNG
- **Temperature Rating:** -325°F to +150°F (-198°C to +65°C)
- **Pressure Rating:** Cold, Non-Shock, 725 psig (50 barg) Class 300 (PN 50)
- Cleaned and packaged for oxygen service per CGA G-4.1
- **Application:** Multiple stem lengths available for selected service
- **Packaging:** Each valve is individually bagged and boxed to arrive in factory new condition until installation

Materials

Body	Stainless Steel ASTM A351 CF8
Bonnet and Tube	Stainless Steel ASTM A351 CF8/ASTM A479 type 304
Stem	Stainless Steel ASTM A582 S30300
Spring	Stainless Steel ASTM A313 S30200
Packing	Live Loaded PTFE Packing
Gasket	PTFE 25% Glass Fill
Seat Disc	PCTFE ASTM D1430
Seat Retainer	Brass ASTM B16
Bonnet Screws	ASTM F837
Handwheel	Painted Aluminum

Quality / Facility Features


- Material traceability in accordance with BS EN 10204 3.1
- CE Marking per European Pressure Equipment Directive



TPED & PED Certified



SKM9408ST

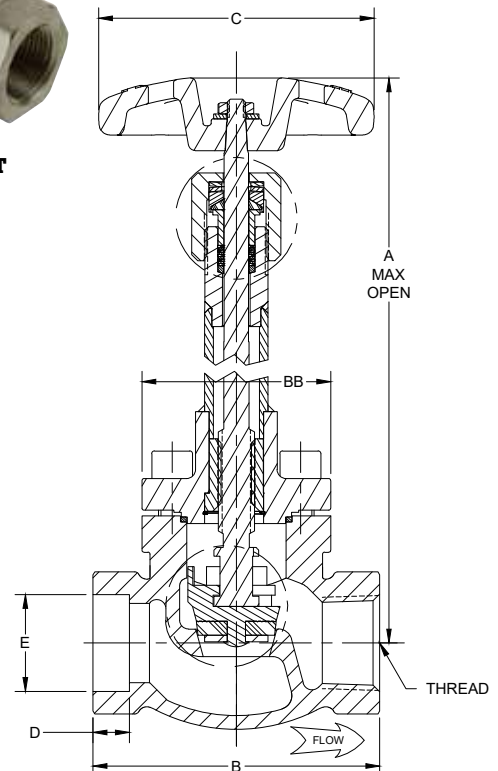

Ordering Information

Part Number	Size Inches	Size DN	Connection		A Inches	A mm	B Inches	B mm	C Inches	C mm	Cv	Kv	Weight lbs	Weight kg
			Inlet	Outlet										
SKM9404ST	1/2"	15	Socket Weld	Threaded NPT	10.6	270	3.09	78.48	4	102	5	4.30	3.29	1.48
SKM9408ST	1"	25					3.95	100.33			14	12.10	5.02	2.27
SKM9412ST	1 1/2"	40					5.00	127.00	5	127	28.3	24.45	8.92	4.04
SKM9416ST	2"	50					5.92	150.37			53	45.80	15.30	6.94